



Main characteristics

- Hermetically sealed register (IP 68)
- Patented hydrodynamically balanced rotor (≤DN 300)
- Patented symmetrical calibration adjustment (≤DN 300)
- Register may be rotated through 360°
- High overload capability
- Pattern approved removable measuring element
- Powder coating affords max. corrosion protection
- Not affected by external magnetic fields
- Register display KL
- Australian Standard lengths
- ISO lengths
- Range exceeds Australian Standard AS3651.1 measurement class 2 requirements
- Test certificates provided

Application

Measurement of high, relatively constant flow rates, e.g. behind pumps

Available options

Up to 3 pulsers (1 x OD, 2 x RD) may be fitted without breaking the approval seal

1/4" connection port for pressure sensors

May be equipped with 3 different electronic registers



HYBRID



ELECTRONIC





ENCODER

Cold water meters pressure rate PN 40 please see special leaflet

Pattern Approval Sign

D95	Nominal Diameter DN 40 ... DN 300
6.132.36	Marking: Metrological class B 30 °C
D80	Nominal Diameter DN 400
6.132.01	Marking: Metrological class B 30 °C

Installation

Pipe	horizontal vertical inclined	
Meter head	upwards sideways	

Installation Requirements

Unrestricted straight pipe in front of the meter 3 x DN (DN400 5 x DN)
No abrupt restrictions directly behind the meter

Performance Table


Performance data WP-Dynamic 50 °C

Nominal Diameter		DN	40	50	65	80	100	125	150	200	250	300	400
Size of meter (acc. to EEC)		Q _n	10	15	25	40	60	100	150	250	400	600	1000
Q _{max}	maximum peak flow once in life time 24 h Q _{max} or 5 min. 1,2 x Q _{max} (±2%)	m ³ /h	60	90	120	200	300	350	600	1200	1600	2000	3000
Q _n	continuous flow (±2%)	m ³ /h	40	50	70	120	230	250	450	800	1250	1400	2000
Q _t	transitional flow (±2%)	m ³ /h	0.8	0.7	0.8	0.8	1.8	2.0	4.0	6.0	11.0	15.0	50
Q _{min}	minimum flow (±5%)	m ³ /h	0.30	0.30	0.40	0.50	0.80	1.00	1.8	4.0	6.0	12.0	25
starting flow		m ³ /h	0.15	0.15	0.20	0.25	0.25	0.5	1.0	1.5	3.0	8.0	15

Performance data according to EEC-specification 30 °C class B


Nominal Diameter		DN	40	50	65	80	100	125	150	200	250	300	400
Size of meter (acc. to EEC)		Q _n	10	15	25	40	60	100	150	250	400	600	1000
Q _{max}	maximum peak flow short time	m ³ /h	30	30	50	80	120	200	300	500	800	1200	2000
Q _n	continuous flow	m ³ /h	15	15	25	40	60	100	150	250	400	600	1000
Q _t	transitional flow	m ³ /h	3.0	3.0	5.0	8.0	12.0	20.0	30	50	80	120	200
Q _{min}	minimum flow	m ³ /h	0.45	0.45	0.75	1.20	1.80	3.00	4.5	7.5	12.0	18.0	30

Typical Accuracy Curve

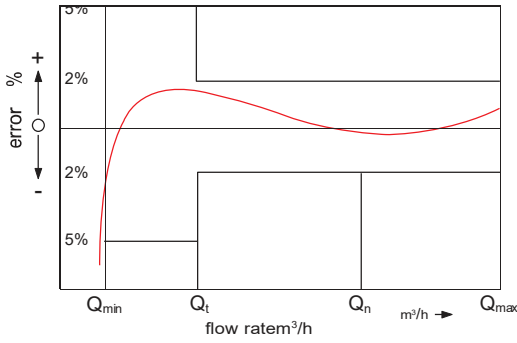

Q_{max} = maximum peak flow
 Q_n = continuous flow
 Q_t = transitional flow $\pm 2\%$
 Q_{min} = minimum flow $\pm 5\%$

Typical Head Loss Curve

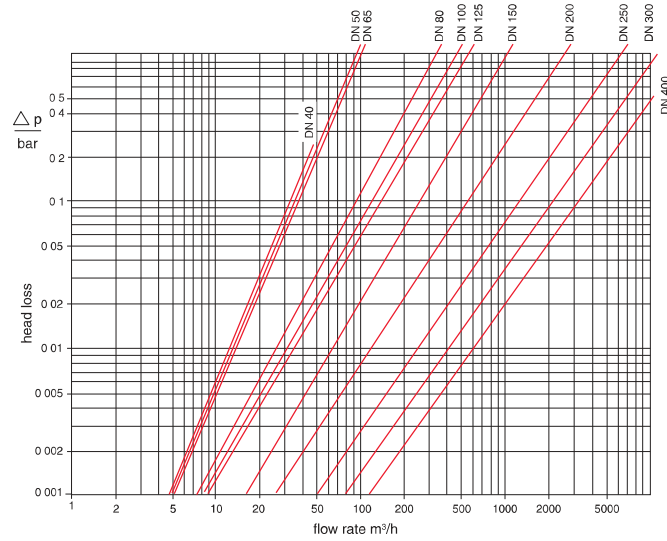


Dimensions and Weights

Nominal Diameter	DN	40	50	80	100	150	150	200	250	300	400	
Size of meter (acc. to EEC)	Q_n	10	15	40	60	500	150	250	400	600	1000	
Dimensions	overall length L *)	mm	220	311	413	483	300	500	350	450	500	
	height	H	mm	120	120	150	150	177	177	206	231	256
		h	mm	69	73	95	105	135	135	162	194	226
			g	mm	200	200	270	270	356	356	441	466
Weights	meter	kg	7.4	7.7	14.0	18.0	30.9	35.5	50.5	72.3	99.3	
	measuring element	kg	1.4	1.4	3.0	3.0	5.9	5.5	7.5	7.5	7.5	
	body	kg	6.0	6.3	11.0	15.0	35	38.3	43.0	63.8	91.8	

*) Other overall lengths on request


Dimension Picture

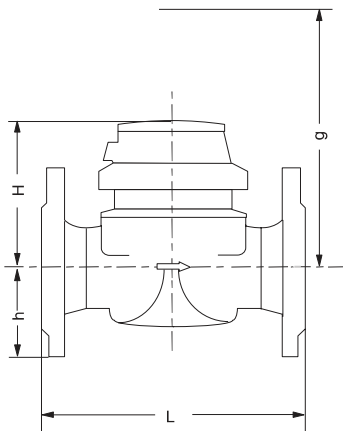


Materials

Body	PN16	cast iron
Measuring element		plastic
Rotor		plastic
We also use the following materials		brass stainless steel


Dials



DN 40 ... DN 125





DN 150 ... DN 300



DN 400

Diameter Nominal DN	Smallest reading m ³	Max. reading m ³
50 ... 125	0.0005	1 000 000
150 ... 300	0.005	10 000 000
400	0.05	100 000 000

Pulse Values

Pulser		DN 40 ... DN 125	pulse value DN 150 ... DN 300	DN 400
RD 01		0.01 and 1 m ³	1 and 10m ³ alternative option 0.1 and 10m ³	10 and 100 m ³
OD 01		0.001 m ³	0.01 m ³	0.1 m ³
OD 03		0.01 m ³	0.1 m ³	1 m ³

Order Example

WP-Dynamic, DN 50, 50/16, L= 311 mm, 1/0.1 m³
 drilled according to EN 1092 PN 16
 828595

type
 diameter nominal
 working temperature
 pressure rate
 overall length
 pulse values
 flange drilling
 order no.